

INMATEH -

**AGRICULTURAL
ENGINEERING**

SEPTEMBER - DECEMBER

Editorial

The National Institute of Research-Development for Machines and Installations designed to Agriculture and Food Industry - INMA Bucharest has the oldest and most prestigious research activity in the field of agricultural machinery and mechanizing technologies in Romania.

Short History

- ✓ In 1927, the first research Center for Agricultural Machinery in Agricultural Research Institute of Romania - ICAR, (Establishing Law was published in O. D. no. 97/05.05.1927) was established;
- ✓ In 1930, was founded The Testing Department of Agricultural Machinery and Tools by transforming Agricultural Research Centre of ICAR- that founded the science of methodologies and experimental techniques in the field (Decision no. 2000/1930 of ICAR, Manager - GHEORGHE IONESCU ȘIȘEȘTI);
- ✓ In 1952, was established the Research Institute for Mechanization and Electrification of Agriculture - ICMA Băneasa, by transforming the Department of Agricultural Machines and Tools Testing;
- ✓ In 1979, the Research Institute of Scientific and Technological Engineering for Agricultural Machinery and Tools - ICSITMUA was founded - subordinated to Ministry of Machine Building Industry - MICM, by unifying ICMA subordinated to MAA with ICPMA subordinated to MICM;
- ✓ In 1996 the National Institute of Research-Development for Machines and Installations designed to Agriculture and Food Industry - INMA was founded - according to G.D. no. 1308/25.11.1996, by reorganizing ICSITMUA, G.D. no. 1308/1996 coordinated by the Ministry of Education and Research G.D. no. 823/2004;
- ✓ In 2008 INMA has been accredited to carry out research and developing activities financed from public funds under G.D. no. 551/2007, Decision of the National Authority for Scientific Research - ANCSno. 9634/2008.

As a result of widening the spectrum of communication, dissemination and implementation of scientific research results, in 2000 was founded the institute magazine, issued under the name of SCIENTIFIC PAPERS (INMATEH), ISSN 1583 – 1019.

Starting with volume 30, no. 1/2010, the magazine changed its name to INMATEH - *Agricultural Engineering*, appearing both in print format (ISSN 2068 - 4215), and online (ISSN online: 2068 - 2239). The magazine is bilingual, being published in Romanian and English, with a rhythm of three issues / year: January-April, May-August, September-December and is recognized by CNCSIS - with B⁺ category. Published articles are from the field of AGRICULTURAL ENGINEERING: technologies and technical equipment for agriculture and food industry, ecological agriculture, renewable energy, machinery testing, environment, transport in agriculture etc. and are evaluated by specialists inside the country and abroad, in mentioned domains.

Technical level and performance processes, technology and machinery for agriculture and food industry increasing, according to national requirements and European and international regulations, as well as exploitation of renewable resources in terms of efficiency, life, health and environment protection represent referential elements for the magazine „INMATEH - *Agricultural Engineering*”.

We are thankful to all readers, publishers and assessors.

Editor in chief,
Ph. D. Eng. Pîrnă Ion

Managing Editorial Board - INMA Bucharest**Editor in Chief**

Pirnă Ion, General Manager, Prof.Ph.D.Eng, SR I, Corresponding member of ASAS

Executive Editor

Vlăduț Valentin, Ph.D.Eng, SR I

Popa Lucreția, Ph.D.Eng, SR I

Assistant Editor

Drâmbei Petronela, Ph.D.Eng, SR I

Cioica Nicolae, Ph.D.Eng, IDT II

Logistic support. database

Muraru Virgil, Ph.D.Eng, SR I

ȚicuTania, techn.

Scientific Secretary

Cârdei Petre, math.

Official translators

Barbu Mihaela, Prof.English, French

E-mail: inmatehjournal@gmail.com**Editorial Board**

- Acad. HERA Cristian - Romania, Honorary President of ASAS - Academy of Agricultural and Forestry Sciences "Gheorghe Ionescu Șişești", member of Romanian Academy;
- Acad. Prof. Ph.D. SIN Gheorghe - Romania, President of ASAS - Academy of Agricultural and Forestry Sciences "Gheorghe Ionescu Șişești";
- Prof.Ph.D. NICOLESCU I. Mihai - Romania, Vicepresident of ASAS - Academy of Agricultural and Forestry Sciences "Gheorghe Ionescu Șişești";
- Hon.Prof.Ph.D.Eng. GĂNGU Vergil - Romania, President of the Department of Agricultural Mechanization of ASAS - Academy of Agricultural and Forestry Sciences "Gheorghe Ionescu Șişești";
- Ph.D. Eng. NICOLESCU C. Mihai - Romania, Scientific General Secretary of the ASAS-Academy of Agricultural and Forestry Sciences "Gheorghe Ionescu Șişești";
- Assoc.Prof. Ph.D. Eng. BELC Nastasia - Romania, IBA Bucharest;
- Ph.D. Eng. BUȚU Alina - Romania, INSB Bucharest;
- Prof. Ph.D. Eng. PARASCHIV Gigel - Romania, P.U. Bucharest;
- Prof. Ph.D.Eng. BIRIȘ Sorin - Romania, P.U. Bucharest;
- Prof. Ph.D. Eng. NICULIȚĂ Petru - Romania, USAMV Bucharest;
- Prof. Ph.D. Eng. VLASE Sorin - Romania, "Transilvania" University Brașov;
- Prof. Ph.D. Eng. ROȘ Victor - Romania, Technical University Cluj Napoca;
- Prof. Ph.D. Eng. FILIP Nicolae - Romania, Technical University Cluj Napoca;
- Prof. Ph.D. Eng. VOICU Gheorghe - Romania, P.U. Bucharest;
- Prof. Ph.D. Eng. GERGEN Iosif - Romania, USAMVB Timișoara;
- Prof. Ph.D. Eng. ȚENU Ioan - Romania, USAMV Iași;
- Assoc.Prof.Ph.D.Eng. BUNGESCU Sorin - Romania, USAMVB Timișoara;
- Prof. Ph.D.Eng. FENYVESILászló - Hungary, Hungarian Institute of Agricultural Engineering Godolo;
- Prof.Ph.D.Eng. KOSUTIC Silvio - Croatia, University of Zagreb;
- Ph.D. BIOCCA Marcello - Italy Agricultural Research Council, Agricultural Engineering Research Unit;
- Prof.Ph.D.Eng. MIHAILOV Nikolay - Bulgaria, University of Rousse;
- Assoc.Prof. Ph.D.Eng. ATANASOV At. - Bulgaria, University of Rousse;
- Assoc.Prof. Ph.D. ERTEKINCan - Turkey, Akdeniz University Antalya;
- Prof. Ph.D.Sc. Eng. VARTUKAPTEINIS Kaspars - Latvia, Latvia University of Agriculture, Institute of Agricultural Machinery;
- ir. HUYGHEBAERT Bruno - Belgium, Walloon Agricultural Research Center CRA-W;
- Prof. Ph.D. Eng. FABBRO Dal Inacio Maria - Brazil, Campinas State University;
- Prof. Ph.D. Eng. DE WRACHIEN Daniele - Italy, State University of Milan;
- Prof. Ph.D. Guanxin YAO - P.R.China, Along Agriculture R&D Technology and Management Consulting Co., Ltd;
- Prof. Ph.D. Eng. GONZÁLEZ Omar - Republic of Cuba, Central University "Marta Abreu" de las Villas;
- Assist. Prof.Dr. KABAŞ Önder - Turkey, Akdeniz University.
- Asist.Prof.Dr. SELVİ Kemal Çağatay - Turkey, Ondokuz Mayıs University.

In the present, INMATEH - Agricultural Engineering journal is indexed in the next international databases:
 ULRICH'S Web: Global Serials Directory, CABI, SCIPPIO, ELSEVIER /SciVerse SCOPUS, Index COPERNICUS International,
 EBSCO Publishing, Elektronische Zeitschriftenbibliothek

INMATEH - Agricultural Engineering

vol. 50, no.3/ 2016

NATIONAL INSTITUTE OF RESEARCH-DEVELOPMENT FOR
 MACHINES AND INSTALLATIONS DESIGNED TO
 AGRICULTURE AND FOOD INDUSTRY - INMA Bucharest

6 Ion Ionescu de la Brad Blvd., sector 1, Bucharest

Three issues per year,
 eISSN: 2068 – 2239
 pISSN: 2068 – 4215

Edited by: INMA Bucharest

Copyright: INMA Bucharest / Romania

CONTENT

		Pag.
1.	<p>DESIGN AND STUDY ON THE EDGE CURVE OF BLADE OF A HANDHELD TILLER'S ROTARY BLADE / 微耕机用旋耕弯刀刃口曲线设计及研究 Ms.Stud. Eng. Li S.T.¹⁾, As. Eng. Yang L.¹⁾, Ph.D. Eng. Niu P.¹⁾, Ms. Stud. Eng. Zhang Y.H.¹⁾, Prof. Eng. XieS.Y.¹⁾, Prof. Eng. ChenX.B.²⁾, Prof. Eng. Yang M.J.¹⁾ ¹⁾ Southwest University, College of Engineering and Technology / P. R. China; ²⁾ Agricultural Machinery Quality Control and Inspection Technology Centre, Nanjing Research Institute for Agricultural Mechanization Ministry of Agriculture / P. R. China</p>	5
2.	<p>IMPROVEMENT OF EQUIPMENT FOR BASIC TILLAGE AND SOWING AS INITIAL STAGE OF HARVEST FORECASTING / ВДОСКОНАЛЕННЯ ТЕХНІКИ ДЛЯ ОСНОВНОГО ОБРОБІТКУ ҐРУНТУ ТА ПОСІВУ – ПОЧАТКОВИЙ ЕТАП ПРОГРАМУВАННЯ ВРОЖАЮ Asst.Ph.D.Stud. Eng. Vasykovska K.V., Lect.Ph.D.Eng. Leshchenko S.M., Lect.Ph.D.Eng. Vasykovskiy O.M., Lect. Ph.D. Eng. Petrenko D.I. Kirovohrad National Technical University / Ukraine</p>	13
3.	<p>EXPERIMENTAL STUDY ON CUTTING CHARACTERISTICS OF CORN SEEDLING SEPARATOR WITH PAPER POT / 玉米纸钵盘分苗机构切割特性试验研究 Ph.D. HuJun¹⁾, B.S. SongYujie¹⁾, Ph.D. LiHailiang¹⁾, B.S. FuQiang¹⁾, Ph.D. Sarker Khokan Kumer²⁾ ¹⁾College of Engineering, Heilongjiang BA YI Agricultural University, Daqing / China; ²⁾Bangladesh Agricultural Research Institute, Dhaka/ Bangladesh</p>	21
4.	<p>KINEMATICS AND STATICS ANALYSIS OF A NOVL 4-DOFPARALLEL MECHANISM FOR LASER WEEDING ROBOT / 基于激光除草机器人的一种新型4自由度并联机构运动学和静力学分析 Ph.D.WangXuelei, Ph.D. Huang Jie, Ph.D. Zhao Dongjie, Ph.D. Guo Honghong, Ph.D. Li Chuanjun, Prof. Zhang Bin College of Engineering, China Agricultural University, Beijing / China</p>	29
5.	<p>THE SERVICE LIFE EVALUATION OF FERTILIZER SPREADERS UNDERCARRIAGES / ОЦІНКА ДОВГОВІЧНОСТІ НЕСУЧИХ СИСТЕМ РОЗКИДАЧІВ ДОБРИВ Prof.Dr.Sc.Eng. Popovych P.V.¹⁾, Prof.Dr.Sc. Eng. Lyashuk O.L.¹⁾, Lect. Ph.D. Eng. Murovanyi I.S.²⁾, Lect. Ph.D. Eng.Dzyura V.O.²⁾, Lect. Ph.D. Eng. Shevchuk O.S.²⁾, Lect. Ph.D. Eng. Myndyuk V.D.³⁾ ¹⁾Ternopil Ivan Pul'uj National Technical University, Ternopil / Ukraine; ²⁾Lutsk National Technical University, Lutsk / Ukraine; ³⁾Ivano-Frankivsk National Technical University of Oil and Gas, Ivano-Frankivsk / Ukraine</p>	39
6.	<p>CFD SIMULATION OF DIFFERENT WATER TANK SHAPES ON TEMPERATURE DISTRIBUTION UNIFORMITY / شبیه سازی CFD مخزن آب با شکلهای متفاوت در یکنواختی توزیع دما Ph.D. Stud.Eng. Farhadi R.¹⁾, Lect. Ph.D.Eng. Farrokhi Teimourlou R.*¹⁾, Lect. Ph.D. Eng. Abbasalizadeh M.²⁾ ¹⁾ Urmia University, Department of Mechanical Engineering of Biosystems / Iran; ²⁾ Urmia University, Department of Mechanical Engineering / Iran</p>	47
7.	<p>PREDICTION OF BEEF FRESHNESS USING A HYPERSPECTRAL SCATTERING IMAGING TECHNIQUE / 利用高光谱散射图像技术预测牛肉新鲜度 Lect.Ph.D. Ma Shibang*¹⁾, Lect.Ph.D. Xue Dangqin²⁾, Ph.D. Stud.Wang Xu³⁾, Prof. Xu Yang³⁾ ¹⁾College of mechatronic engineering, Nanyang Normal University, Henan/China; ²⁾ College of Mechanical & Automotive Engineering , Nanyang Institute of Technology, Henan / China; ³⁾College of Engineering, China Agricultural University, Beijing / China</p>	55

		Page.
8.	<p>PATTERNS OF CHANGING SETTINGS OF THE TEMPERATURE FIELD AT VAPOUR-CONTACTING HEATING BY STERILIZING PRODUCTS IN CYLINDRICAL CONTAINERS / ЗАКОНОМІРНОСТІ ЗМІНИ ПАРАМЕТРІВ ТЕМПЕРАТУРНОГО ПОЛЯ ПРИ ПАРОКОНТАКТНИЙ СТЕРИЛІЗАЦІЇ ПРОДУКЦІЇ У ЦИЛІНДРИЧНИЙ ТАПІ Ph.D.Polyevoda Y.A.¹⁾, Postgraduate Hurych A.J.¹⁾, Assistant Kutsyy V.M.²⁾ ¹⁾Vinnitsa National Agrarian University / Ukraine; ²⁾Podilay State Agricultural and Technical University</p>	65
9.	<p>HEAT AND MASS TRANSFER DURING HOT-AIR DRYING OF RAPESEED: CFD APPROACH AND EVALUATION / 基于 CFD 的油菜籽热风干燥传热传质研究与验证 Ms. Stud. Gao B.¹⁾, Ms. Stud. Guo M.B.²⁾, As. Ph.D. Yang L.¹⁾, Asst. Ph.D. Wu D.K.¹⁾, Prof.Ph.D. Yang M.J.*¹⁾ ¹⁾ Southwest University, College of Engineering and Technology / P. R. China; ²⁾Dezhou Degong Machinery Co. Ltd / P. R. China</p>	73
10.	<p>DISCRETE MODELLING OF SURFACES OF EQUAL SLOPES BY MEANS OF NUMERICAL SEQUENCES / ДИСКРЕТНЕ МОДЕЛЮВАННЯ ПОВЕРХОНЬ ВІДВАЛІВ ВИЗНАЧЕНОГО ОБ'ЄМУ ПОДВІЙНИМИ ЧИСЛОВИМИ ПОСЛІДОВНОСТЯМИ Prof. Ph.D. Eng.Pustiulha S., Khomych A., Ph.D. Eng.Tsiz' I., Ph.D. Eng.Kirchuk R. Lutsk National Technical University / Ukraine</p>	83
11.	<p>DEVELOPMENT OF DESIGNS AND INVESTIGATION OF OPERATION PROCESSES OF LOADING PIPES OF SCREW CONVEYORS / РОЗРОБКА КОНСТРУКЦІЙ ТА ДОСЛІДЖЕННЯ ПРОЦЕСІВ РОБОТИ ЗАВАНТАЖУВАЛЬНИХ ПАТРУБКІВ ГВИНТОВИХ КОНВЕЄРІВ Prof. Ph.D. Eng. Hevko R.B.¹⁾, Ph.D. Eng. Rozum R.I.¹⁾, Ph.D. Eng. Klendii O.M.²⁾ ¹⁾Ternopil National Economical University / Ukraine; ²⁾Separated Subdivision of National University of Life and Environmental Sciences of Ukraine Berezhan Agrotechnical Institute / Ukraine</p>	89
12.	<p>REGULATING THE MOISTURE OF OILSEED MATERIAL IN A TOASTER FOR VEGETABLE OIL EXTRACTION / РЕГУЛІРАНЕ НА ВЛАЖНОСТТА НА ЗЪРНЕН МАТЕРИАЛ В ПЕКАЧ ЗА ИЗВЛИЧАНЕ НА РАСТИТЕЛНИ МАСЛА Lecturer Ph.D. Eng. Kadirova S. Y.¹⁾, ¹⁾Rousse University "Angel Kunchev", Faculty of Electrical Engineering, Electronics and Automation / Bulgaria</p>	99
13.	<p>THE EFFECT OF SPELT ADDITION ON THE PROPERTIES OF EXTRUDED PRODUCTS WITH ENHANCED NUTRITIONAL PROPERTIES / WPLÝW DODATKU ORKISZU NA WŁASNOŚCI EKSTRUDOWANYCH WYROBÓW O PODWYŻSZONYCH WŁASNOŚCIACH ŻYWIENIOWYCH Ph.D.Eng. Żelaziński T.*¹⁾, Ph.D. DSc.Eng. Ekielski A.¹⁾, MSc. Eng. Siwek A.²⁾, Ph.D.Eng. Stachelska M.²⁾, Ph.D. Stud. Eng. Florczak I.¹⁾ ¹⁾Department of Production Management and Engineering. Warsaw University of Life Sciences– SGGW / Poland; ²⁾Food Technology and Gastronomy Institute, Lomza State University of Applied Sciences / Poland</p>	105
14.	<p>CFD STUDY OF A SWEEP-TWIST HORIZONTAL AXIS WIND TURBINE BLADE / BOYUNA-EĞİMLİ BİR YATAY EKSENLİ RÜZGÂR TÜRBİNİ KANADININ HAD ÇALIŞMASI Ph.D. Stud. Eng. Kaya M. N.*¹⁾, Asst. Prof. Ph.D. Eng. Köse F.²⁾ ¹⁾Karamanoglu Mehmetbey University, Engineering Faculty, Mechanical Engineering Department, Karaman / Turkey; ²⁾Selcuk University, Engineering Faculty, Mechanical Engineering Department, Konya / Turkey</p>	111
15.	<p>AGRICULTURAL RESIDUES GASIFICATION, DEPENDENCY OF MAIN OPERATIONAL PARAMETERS OF THE PROCESS ON FEEDSTOCK CHARACTERISTICS / ГАЗИФІКАЦІЯ СІЛЬСЬКОГОСПОДАРСЬКИХ ВІДХОДІВ, ЗАЛЕЖНІСТЬ ОСНОВНИХ ЕКСПЛУАТАЦІЙНИХ ПАРАМЕТРІВ ПРОЦЕСУ ВІД ХАРАКТЕРИСТИК СИРОВИНИ Assoc.prof.PhD.Eng. Zolotovs'ka O.V.¹⁾, Prof.Ph.D. Kharytonov M.¹⁾, PhD.Stud. Onyshchenko O.¹⁾, ¹⁾ State Agrarian and Economic University, Center of Ecological Agriculture, Dnipro / Ukraine</p>	119

PATTERNS OF CHANGING SETTINGS OF THE TEMPERATURE FIELD AT VAPOUR-CONTACTING HEATING BY STERILIZING PRODUCTS IN CYLINDRICAL CONTAINERS

ЗАКОНОМІРНОСТІ ЗМІНИ ПАРАМЕТРІВ ТЕМПЕРАТУРНОГО ПОЛЯ ПРИ ПАРОКОНТАКТНІЙ СТЕРИЛІЗАЦІЇ ПРОДУКЦІЇ У ЦИЛІНДРИЧНІЙ ТАРІ

Ph.D. Polyevoda Y.A.¹, Postgraduate Hurych A.J.¹, Assistant Kutsyy V.M.²

¹Vinnitsa National Agrarian University/ Ukraine; ²Podiliay State Agricultural and Technical University
Tel: +380672151148; E-mail: vinvura29@mail.ru

Keywords: *heat exchanger mode, temperature field, sterilization, vapour-contacting heating*

ABSTRACT

In the article, we sustained the heat exchange process and regime parameters and defined the changing patterns of temperature characteristics of the pressure in the working area in terms of vapour-contacting heating in container.

РЕЗЮМЕ

У статті обґрунтовано теплообмінні режимні параметри процесу та визначені закономірності зміни температурних характеристик тиску в робочій зоні в умовах пароконтактного нагріву в тарі.

INTRODUCTION

The kinetics of biochemical reactions under varying degrees depends on the thermal, chemical and mechanical sensitivity of the processed product, on pressure, temperature and chemical potential. Pressure is distributed in a liquid by Pascal principle in all directions, accompanied by a large adiabatic pressure changes with the speed of sound. For this reason, we can assume that there is pressure almost instantaneously throughout the chamber. From this assumption it follows that the effect of pressure comparing with the thermal process has the advantage that can influence rapidly and in homogenous way to all the processed stuff regardless of shape, size and composition. However, it was left unattended possibility of physical and thermal heterogeneity (Alekseev E. and Pakhomov E., 1982; Belyaeva M., 2003; Nechepurenko I., 1991; Tugolukov E. 2004; Voronenko B. et al, 2008).

Creating high-productive heat exchange equipment that meets modern level of industry and technology development requires significant intensification of heat exchange processes that are sufficiently widely implemented in known scientific schools (Palamarchuk I. et al, 2013; Terzyev S. et al, 2014; Terzyev S. and Kurakov A., 2012; Tsurkan O. et al, 2010; Tsurkan O. et al, 2015).

Among the intensification means factors were used devices of mechanical and technological vibration action (Palamarchuk I., Bandura V., Palamarchuk V., 2013; Palamarchuk I., 2008), the use of infrared radiation (Terziev S., Malashevych S., Ruzhytska S., 2011; Terziev S., 2016), baro-thermal effect and others (Terziev S., 2016).

One effective way, both in terms of the intensification of the process of heat and energy savings is the product contact heating with steam use, which makes technology's impact on processed products.

Heat at products vapour-contacting heating is a complex phenomenon associated with the simultaneous transfer of heat and mass substance. The number of transferred mass is determined by the condensed steam and transferred to the heat (if vapour) - heat of vaporization (Voronenko B. et al, 2008).

In vapour-contacting heating it is taken into account a significant number of determining factors, the most important are the thermal properties of the heating steam, and the physical and chemical properties of the product. Taking into account all the factors that affect the process of heat transfer at vapour-contacting heating and analysis are very difficult, not only in theory but in the experimental aspects as well.

The main parameter during heat sterilization of food, including using vapour-contacting heating temperature is a product, which is the major factor for the establishment of canned food sterilization regimes. Therefore, one of the main objectives of the study sterilization process at the appointed method of heating is to determine the product temperature field or identify the dynamics of temperature change at

different points in the product, depending on the parameters of steam that heats the conditions of supply to the product and the physical properties of the treated material (TU 10.1-22769675-001, 2013).

Therefore, for foundation of heat exchange operational parameters it is necessary to determine the patterns of temperature change characteristics of pressure in the working area in terms of vapour-contacting heating in container.

MATERIAL AND METHOD

Instability of temperature field can be explained by the fact that the pressure rises in the phase of volume increase due to changes in the temperature of the treated environment. The adiabatic change of state in a clean, inert and homogeneous medium changes the temperature according to changes in pressure, which is determined by (1):

$$dT = \frac{T \cdot \beta}{\rho \cdot c_p} dp \quad (1)$$

where:

T – the temperature, (K);

β – coefficient of thermal expansion, (K^{-1});

ρ – liquid density, (kg / m^3);

c_p – specific heat, ($J / (kg \cdot K)$);

p – pressure, (Pa).

Depending on the product being processed at the pressure of 1 GPa temperature rises to several tens of Celsius degrees. Filled chamber pressure is a system consisting of product packaging materials, medium transmitting the pressure (intermediate fluid) and the steel wall of the chamber. These materials have different thermal properties. Consequently, despite the initial parameters of homogeneous temperature distribution, while increasing the pressure in the chamber, it can form a homogeneous temperature field (Nechepurenko I., 1991).

For the formal definition of the temperature increase caused by increased pressure, we took the first equation of conservation, which brought the equation (2) of total heat capacity H :

$$\frac{d(\rho \cdot H)}{d\tau} + \nabla \cdot (\rho \cdot \vec{v} \cdot H) = \frac{dp}{d\tau} + \nabla \cdot (\lambda \nabla T) + \nabla \cdot (\xi \cdot \vec{v}) + \rho \cdot \vec{q} \cdot \vec{v} \quad (2)$$

where:

\vec{v} – velocity vector fluid;

q – vector of gravity;

τ – time, (sec.);

λ – thermal conductivity of material, ($W / (m \cdot K)$);

ξ – tensor of stresses in the material.

For specific heat capacity h :

$$\rho \frac{dh}{d\tau} - \frac{dp}{d\tau} = \nabla \cdot (\lambda \nabla T) + \eta \cdot \Phi + \rho \cdot \vec{q} \cdot \vec{v} \quad (3)$$

where:

Φ – dissipation function;

r – container radius, (m);

R_1 – autoclave radius, (m);

$\eta = \ln(r/R_1)$ – independent argument of desired temperature.

Then, using thermodynamic ratio:

$$\frac{dh}{d\tau} = \frac{dh}{dp} \Big|_T \frac{dp}{d\tau} + \frac{dh}{dT} \Big|_p \frac{dT}{d\tau} = \frac{1}{\rho} (1 - \alpha \cdot T) \frac{dp}{d\tau} + c_p \frac{dT}{d\tau} \quad (4)$$

where:

α – coefficient of heat on the outer surface of the cylinder.

We got the heat equation:

$$\rho \cdot c_p \frac{dT}{d\tau} = \alpha \cdot T \frac{Dp}{D\tau} + \nabla \cdot (\lambda \nabla T) + \eta \cdot \Phi + \rho \cdot \vec{q} \cdot \vec{v} \quad (5)$$

The last equation shows that the material derivative of temperature T as to time τ carries material derivative of pressure on P as to time τ , until dissipation function Φ and the potential energy and flow that carries high temperature, are low. Taking into consideration this fact, we came to approximate heat transfer equation:

$$\frac{dT}{d\tau} \approx \frac{dT}{\rho \cdot c_p} \frac{dp}{d\tau} \quad (6)$$

It is considered that the fluid motion is obvious in the processing of liquid substance pressure. To show this mathematically, we assumed that the density increases with pressure and decreases with increasing temperature grounded for much of the food and similar substances in the environment (Palamarchuk I., Tsurkan O., Hurych A., 2015). The appearance of the flow in the liquid, which initially is at rest was shown using mass balance equation:

$$\frac{d\rho}{d\tau} + \nabla \cdot (\rho \cdot \vec{v}) = 0 \quad (7)$$

During the compression phase density increases with pressure. So, the first member of the equation (7) is different from zero. Since the left side must be zero fluid velocity \vec{v} must accept non-zero value. Therefore, increasing the pressure increases the fluid flow. Temperature gradients are important in handling a deviation from hydrostatic flow conditions. We have traced this conclusion using the basic equations of hydrostatics:

$$\frac{dp}{dx} = 0 \quad (8)$$

$$\frac{dp}{dy} = 0 \quad (9)$$

$$\frac{dp}{dz} = -\rho \cdot \vec{q} \quad (10)$$

The equations (8-10) x , y and z are Cartesian coordinates. Without losing z overview we accepted that the vector of gravity points in the negative z direction. Further conversion of (9) and in respect of (10) in relation it gave the following result:

$$\frac{d^2 p}{dydz} = \frac{d^2 p}{dzdy} = -\frac{d\rho}{dy} \vec{q} \quad (11)$$

Thus, the right side of equation (11) and original density must be constant and equal to zero:

$$\frac{d\rho}{dy} = 0 \quad (12)$$

However, this condition, as the hydrostatics cannot be kept. While density is a function of temperature, and the latter is exposed to a direction different from the direction of gravity vector, equation (12) is broken. As a consequence, there must necessarily appear vapour stream at a rate different from zero, which leads to convective heat transfer and suspended solids.

For the developed scheme of autoclave where heat is carried by vapour placed outside cup, the problem reduces to the calculation of non-stationary temperature field in a container that is heated from the outer surface of the heat source given by the intensity of the light convection in the radial direction.

It is assumed that the thermal resistance of the outer wall is relatively small, and the thermal properties of the material do not depend on temperature. This heat equation considering the convective component has the form (Tugolukov E., 2004):

$$\frac{dt}{d\tau} + u \frac{dt}{dr} = \frac{\lambda}{c_p \cdot \rho \cdot r} \frac{d}{dr} \left(r \frac{dt}{dr} \right) \quad (13)$$

where:

u – velocity of the fluid m / s.

Terms of uniqueness:

- Initial conditions for $\tau = 0$

$$t(r, 0) = t(r) = t_H \quad (14)$$

- Extreme conditions

$$\left(\frac{dt}{dr}\right)_{r=R_1} = -q / \lambda \quad (15)$$

$$\left(\frac{dt}{dr}\right)_{r=R_2} = -a \cdot (t - t_s) / \lambda - \frac{q_2}{\lambda} \quad (16)$$

where:

t_s – ambient temperature, (K);

t_H – the initial temperature of the material processed, (K);

q – specific heat flux on the inner surface of the autoclave, (W/m²);

R_2 – radius packaging, (m).

RESULTS

As we consider the problem of calculating the temperature field depending on the radius of the autoclave, it is assumed that the specific heat flow and the velocity of steam through the surface of the container does not depend on its length and thus is not considered a limiting effect, manifested through the finite size of the packaging.

Accordingly, we define the relationship between speed and specific heat flow. In vapour-contacting heating steam is fed evenly and specific heat flow is equal to:

$$q_1 = G_n \cdot i_x / 2 \cdot \pi \cdot R_1 \cdot l \quad (17)$$

where: G_n – steam consumption, (kg/s);

i_x – enthalpy of steam (J/kg);

l – the length of container, (m).

The actual amount of steam, creating a convective flow can be determined from the heat balance equation:

$$G_n \cdot i_x = G_{\text{ж}} \cdot t_H \cdot c_{p,\text{ж}} \quad (18)$$

where:

$G_{\text{ж}}$ – number of newly condensate, (kg/s);

$c_{p,\text{ж}}$ – specific heat capacity mass of condensate, (J/(kg K)).

The velocity of steam in an autoclave with r radius defined by:

$$u = G_{\text{ж}} / 2 \cdot \pi \cdot r \cdot l \cdot \rho_{\text{ж}} \quad (19)$$

where: $\rho_{\text{ж}}$ – density of vapor.

Substituting (17) in (18) and (18) to (13), we get:

$$\frac{dt}{d\tau} = \left(\frac{\lambda}{c_p \cdot \rho} - \frac{G_n}{2 \cdot \pi \cdot l \cdot \rho} \right) \frac{1}{r} \frac{dt}{dr} + \frac{\lambda}{c_p \cdot \rho} \cdot \frac{d^2 t}{dr^2} \quad (20)$$

$$\left(\frac{dt}{dr}\right)_{r=R_1} = \frac{G_n \cdot c_p \cdot t_H}{2 \cdot \pi \cdot R_1 \cdot \lambda \cdot l} \quad (21)$$

$$\left(\frac{dt}{dr}\right)_{r=R_2} = -\frac{a}{\lambda} (t - t_s) + \frac{G_n \cdot c_p \cdot t}{4 \cdot \pi \cdot R_2 \cdot \lambda \cdot l} \quad (22)$$

$$t(r, 0) = t_H \quad (23)$$

Equation (17-22) can be written in parametric form. As characteristic parameters we introduce the following dimensionless quantities:

$\theta = t / t_H$ – the required dimensionless grand;

$\theta_g = t_e / t_n$ – dimensionless magnificent environment;

$F_0 = \tau \cdot \lambda / c_p \cdot \rho \cdot R_1^2$ – the number of Fourier;

$B_i = a \cdot R_1 / \lambda$ – the number of Biot.

$$Q_1 = G_{\kappa} \cdot c_p / 2 \cdot \pi \cdot l \cdot \lambda \quad \ln(R_2 / R_1) \quad (24)$$

With regard introduced dimensionless equations (20-23) will be:

$$\frac{d\theta}{dF_0} = \exp(-2 \cdot \eta) \left[(1 - Q_1) \frac{d\theta}{d\eta} + \frac{d^2\theta}{d\eta^2} \right] \quad (25)$$

$$\left(\frac{d\theta}{d\eta} \right)_{\eta_1=0} = Q_1 \quad (26)$$

$$\left(\frac{d\theta}{d\eta} \right)_{\eta_2=0} = \left[B_i (\theta_g - \theta) - Q_1 \cdot R_1 \cdot \frac{\theta}{R_2} \right] \exp \eta_2 \quad (27)$$

$$t(\eta_1, 0) = 1 \quad (28)$$

The mathematical model, taking into account boundary conditions of a system of differential equations (25)-(28), which solution has the form (Alekseev E. and Pakhomov E., 1982):

$$\theta = \theta(F_0, B_i, \eta, Q_1, \frac{R_1}{R_2}) \quad (29)$$

Thus, the mathematical model determining the dynamics of the temperature field in the container is found dependence (29), satisfying the conditions of the field $D\{(F_0, \eta); 0 \leq F_0 \leq \phi; 0 \leq \eta \leq \eta_2\}$ of (25) and limit (26, 27) and the initial conditions (28), respectively.

To solve this problem we apply numerical method (Belyaeva M., 2003). That is why we build a uniform space-time increments chart:

$$\Delta\eta = \eta_2 / N \quad (30)$$

where:

N – number of quantization step of given area $\Delta F_0 = \Phi_1 / M$;

M – the number of partitions of a given region, pc.;

Φ_1 – Fourier pre-specified number (time).

Using conventional implicit difference scheme approximation of (25-27) it will be:

$$\theta_{i,j} - \theta_{i,j-1} = \Delta F_0 \exp(-2\eta_i) \left[(1 - \theta_1) (\theta_{i+1,j} - \theta_{i-1,j}) / 2\Delta\eta + (\theta_{i+1,j} - 2\theta_{i,j} + \theta_{i-1,j}) \right] \Delta\eta^2 \quad (31)$$

where:

$$(i = 1, 2, 3 \dots N-1; j = 1, 2, 3 \dots M)$$

$$\theta_{1,j} - \theta_{0,j} = \theta_1 \Delta\eta \quad (32)$$

$$\theta_{N,j} - \theta_{N-1,j} = \Delta\eta \cdot \exp \eta_2 \left[B_i (\theta_g - \theta_{N,j}) - Q_1 \theta_{N,j} \cdot R_1 / R_2 \right] \quad (33)$$

We rewrite equation (29, 31, 32) in the form:

$$-A_i \theta_{i-1,j} + C_i \theta_{i,j} - B_i \theta_{i+1,j} = f_i (i = 0, 1, 2, 3 \dots N) \quad (34)$$

where:

$C_0, B_0, f_0, A_N, C_N, f_N$ – coefficient describing boundary conditions;

$\theta_{i,j}$ – dependent function;

A_i, B_i, C_i, f_i – energy equation coefficient.

Accordingly, (25-28), the expression for the coefficients of the system (33) takes the form:

$$A_0 = 0; C_0 = 1; B = -1; f_0 = -Q_1 \Delta\eta$$

$$A_i = \Delta F_0 \exp(-2 \cdot \eta_i) \left[(\Delta\eta^{-2} + 0,5 \cdot Q_1 \cdot \Delta\eta^{-1}) \right]$$

$$B_i = \Delta F_o \exp(-2 \cdot \eta_i) [(\Delta \eta^{-2} + 0,5 \cdot Q_1 \cdot \Delta \eta^{-1})] \quad (35)$$

$$C_i = 1 + 2\Delta F_o \Delta \eta^{-2} \exp(-2 \cdot \eta_i)$$

$$f_i = \theta_{i,j-1}$$

$$A_N = 1; C_N = 1 + \Delta \eta \exp \eta_2 (B_i + Q_1 \cdot \frac{R_1}{R_2})$$

$$B_N = 0; f_N = B_i \theta_N \Delta \eta \exp \eta_2$$

Thus, using linear approximation of unknown function boundary problem is reduced to a system of algebraic equations.

To solve this system we apply three-diagonal matrix algorithm. The solution of the boundary problem for the j^{th} time layer is defined by:

$$\theta_{1,j} = a_{i+1,j} \theta_{i+1,j} + \beta_{i+1,j} \quad (36)$$

where: $a_{i+1,j}$, $\beta_{i+1,j}$ – selective coefficients are determined by recurrent formulas.

$$a_o = B_o / C_o; \beta_o = f_o / C_o; a_{i+1,j} = \frac{B_i}{(C_i - A_i a_i)}; \beta_{i+1,j} = \frac{f_i + A_i \beta_i}{(C_i - A_i a_i)} \quad (37)$$

Note that the expression for θ the point (N, j) , respectively (34) taking into account (36) takes the form:

$$\theta_{N,j} = \beta_N \quad (38)$$

The results of numerical experiment to calculate the temperature field along the radius of the cylindrical container, depending on the parameters of steam that heats and the product, are shown in Fig.1,2.

Fig.1 shows the curve of temperature field at vapour-contacting heating of product from initial temperature $t_{\text{н}} = 50^\circ\text{C}$ to a final temperature $t_{\text{нк}} = 100^\circ\text{C}$ condensing steam with temperature $t_{\text{н}} = 100^\circ\text{C}$ at the rate of steam equal to 0.001 kg/s, where r – distance distribution of temperature field. Ambient temperature accepted $t_{\text{в}} = 20^\circ\text{C}$ and the heat transfer coefficient on the outer surface of the cylinder is $a=10$. As shown in Fig.1 at the initial time (1.5-3 sec), the temperature in the central layer almost instantaneously increases to a temperature steam condensation. In the peripheral layers of the product temperature does not change.

With further heating, mainly due to the resulting radial convective flows and thermal conductivity, heat flow gradually reaches the peripheral layers over time $\tau = 260$ s. As a result, throughout the range is set the uniform temperature field. To determine the influence of parameters of the heating steam at the temperature field distribution of the product, we performed calculations at different temperatures vapour.

Fig.2 shows the curve of the temperature field at the heating vapour $t_{\text{н}} = 110^\circ\text{C}$. Apparently, fever helps intensify the process of heat transfer. However, this leads to pronounced temperature difference between central and peripheral fields.

Comparison of computer results with experimental data leads to the conclusion that the solution of the problem of computer calculation the temperature field of product gives very satisfactory results between the calculated and experimental data.

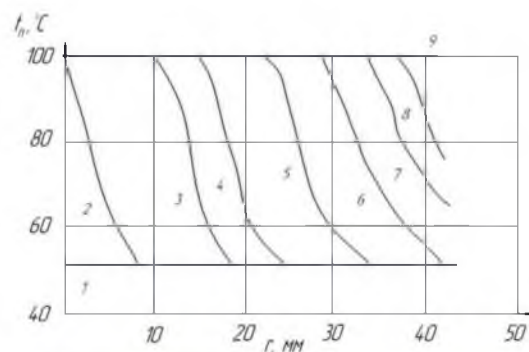


Fig. 1 – Curve of temperature field in the heat vapour-contacting product in a cylindrical container with an external supply of heat at the heating vapor:

$t_n = 100^\circ\text{C}$: 1 – $t = 0$; 2 – $t = 1$; 3 – $t = 20$; 4 – $t = 40$; 5 – $t = 80$; 6 – $t = 120$; 7 – $t = 160$; 8 – $t = 180$; 9 – $t = 200$

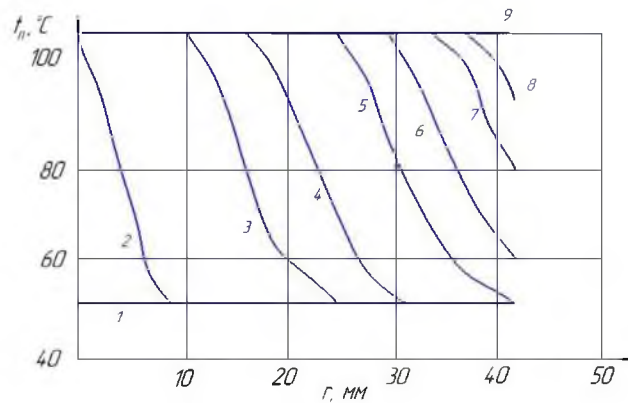


Fig. 2 – Curve of temperature field in the heat vapour-contacting product in a cylindrical container with an external supply of heat at the heating vapor:

$t_n = 110^\circ\text{C}$; 1 – $t = 0$; 2 – $t = 1$; 3 – $t = 20$; 4 – $t = 40$; 5 – $t = 80$; 6 – $t = 120$; 7 – $t = 160$; 8 – $t = 180$; 9 – $t = 200$

CONCLUSIONS

- The presence of thermal heterogeneity in food and its further growth needs forecasting and research measures to counter effectively implemented in the vapor-contacting sterilization.
- In mathematical modeling vapour-contacting heating products during sterilization had composed the heat equation, taking into account factors such as changes in temperature, pressure, fluid flow rate and the basic physical and mechanical properties of interacting environments.
- By using the methods of numerical analysis have been built depending graphic variables of temperature fields that have identified the necessary conditions for intensification of heat exchange in the vapour-contacting sterilization, which allows identifying effective operating modes of treatment.

REFERENCES

- [1] Alekseev E., Pakhomov E., (1982), *Simulation and optimization of technological processes in the food industry (Моделирование и оптимизация технологических процессов в пищевой промышленности)*, Moscow/Russia, PA "Agropromizdat", p.272;
- [2] Belyaeva M., (2003), *Mathematical modelling of technological processes in food productions (Математическое моделирование технологических процессов пищевых производств)*, Tashkent, Publishing Tashkent chemical and technological institute, Tashkent/Uzbekistan, p.168;
- [3] Nechepurenko I., (1991), Kinetics of canned sterilization process in continuously sterilizing machine (Кинетика процесса стерилизации консервов в стерилизаторе непрерывного действия). *All-Union scientific technique conference "Cold–People Improvement" (Всесоюзная научно-техническая конференция "Холод – народному хозяйству")*, AL: LTYHP, pp.268-269;
- [4] Palamarchuk I., Zozulyak O., Gerasimov A., (2013), Development of management system of bulk materials drying. *MOTROL. Commission of Motorization and Energetics in Agriculture*, Vol.15, №4, pp.212-218;
- [5] Palamarchuk I., Bandura V., Palamarchuk V., (2013), Analysis of vibro-conveyor technological system with combined kinematic vibro-stimulator. *MOTROL. Commission of Motorization and Energetics in Agriculture*, Vol.15, № 4, pp.314-323;
- [6] Palamarchuk I., (2008), *Scientific and technical bases of development of energy-efficient mechanical vibration action of food and processing industries (Науково-технічні основи розроблення енергозберігаючих вібротехнічних механічної дії харчових і переробних виробництв)*, Dis.Dr.Sc. Sciences: 05.18.12, Kyiv/Ukraine, p.461;
- [7] Palamarchuk I., Tsurkan O., Hurych A., (2015), Selection electronic devices to operate the autoclave with aerodynamic intensifier (Вибір електронних пристроїв для керування роботою автоклава з аеродинамічним інтенсифікатором), *Innovative aspects of food processing and hospitality industry in terms of modernity: International scientific conference (Міжнародна науково-практична конференція)*, Kharkov/Ukraine, HDUHT, pp.73-74;
- [8] Terzyev S., Makyevska T., Ruzhytskaya N., (2014), Kinetics of sludge extraction coffee at microwave summing energy, *Sciences. pr.ONAFT (Наукові пр.ОНАФТ)*, Odessa/Ukraine, Vol.46, T.2, pp.300-303;

- [9] Terzyev S., Kurakov A., (2012), *Electro-diffusion model of heat-and mass transmission in thermosyphon apparatus (Электродиффузионная модель тепломассопереноса в термосифонных аппаратах)*. Science.pr.ONAFT (Наукові пр. ОНАХТ), Odessa/Ukraine, Vol.41, Т.1, pp.219-222;
- [10] Terziev S., Malashevych S., Ruzhytska S., (2011), Investigation of sludge drying coffee under infrared (Дослідження процесу сушіння шламу кави під дією інфрачервоного випромінювання), *Scientific Bulletin of Lviv National University of Veterinary Medicine and Biotechnology named. S. Z. Gzhytskoho (Науковий вісник Львівського національного університету ветеринарної медицини та біотехнології ім. С. З. Гжицького)*, Lviv/Ukraine, Т.13, № 4 (50), С.4, pp.131-134;
- [11] Terziev S., (2016), *Innovative heat technologies of food concentrates production based on system modelling and combined heat and mass transfer processes (Іноваційні теплотехнології харчоконцентратних виробництв на основі системного моделювання та комбінованих процесів тепломасопереносу)*: Author. Dis. on competition sciences. Degree dock. Sc. Science, Odessa/Ukraine, pp.45;
- [12] Tsurkan O., Gerasimov O., Hurych A., (2010), Substantiation of equipment for adjusting process parameters autoclave with aerodynamic intensifiers (Обґрунтування комплексу обладнання для регулювання технологічних параметрів автоклава з аеродинамічним інтенсифікатором), *Journal of Kharkov National Technical University of Agriculture Petro Vasilenko (Вісник Харківського національного технічного університету сільського господарства імені Петра Василенка)*, Kharkov/Ukraine, Vol.166, pp.274-279;
- [13] Tsurkan O., Hurych A., Polyevoda Y., (2015), *Substantiation of technological and structural schemes autoclave with aerodynamic intensifier (Обґрунтування технологічної та конструктивної схеми автоклава з аеродинамічним інтенсифікатором)*. Scientific pr.ONAFT (Наукові пр. ОНАХТ), Odessa/Ukraine, Vol.46, Т.2, pp. 312-314;
- [14] TU 10.1-22769675-001, (2013), *Paste Canned meat turkeys "Podolsky" (Паштет консервований із м'яса індиків "Подільський")*. ТС № 132 Derzhspozhyvstandart, Lviv/Ukraine, p.10;
- [15] Tugolukov E., (2004), Methods of mathematical modelling of non-stationary temperature subspace device (Методика математического моделирования нестационарных температурных полей емкостного аппарата), *Chemical industry (Химическая промышленность)*, Vol.81, № 2, pp.84-92;
- [16] Voronenko B., Pelenenko V., Starikov V., (2008), Mathematic description of heat and mass transfer processes in sausage production (Математическое описание процессов тепло- и массопереноса в колбасных изделиях при их тепловой обработке), *Processes and Apparatus of food production (Процессы и аппараты пищевых производств)*, № 2, pp.27-30.



Edited by: INMA Bucharest

6 Ion Ionescu de la Brad Blvd., sect. 1, Bucharest, ROMANIA

Tel: +4021.269.32.60; Fax: +4021.269.32.73

<http://www.inmateh.eu>

e-mail: inmatehjournal@gmail.com

